



Using ClickStart on a Macintosh

To use ClickStart on a Macintosh, perform the following tasks using the MacTCP Control Panel (Control Panels are in the Apple menu).

- 1 Check that the Macintosh has the correct IP address. This address is shown in the IP Address box:

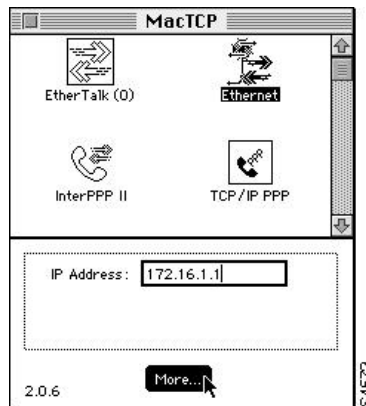

- 2 Click the **More...** button to display the next MacTCP dialog box:

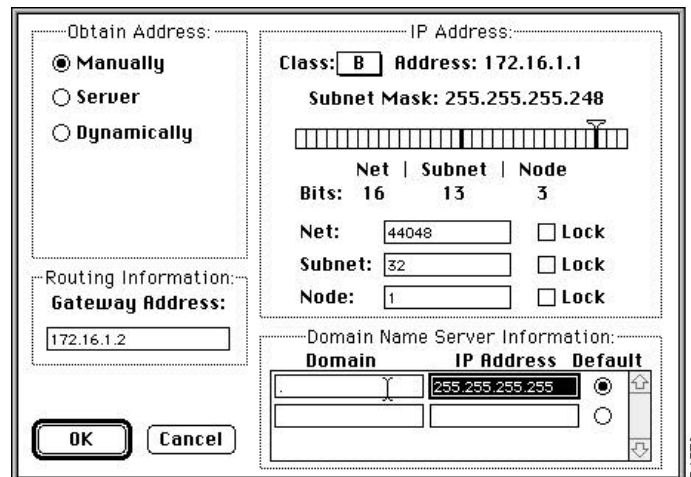

- 3 Configure 255.255.255.255 as the IP address of the DNS server.
- 4 Configure the domain name to be a period (.).
- 5 After you have configured the router, set the default gateway to the router's IP address.

If you change any of these parameters from previous settings, you must restart the Macintosh.

<HR>

Use the Web browser's back button and return to the previous menu to continue to configure your router.

[Return to ClickStart Home Page](#)

